

PM 10 S C

**PM Oil&Steel SpA**

IT - 41018 S. Cesario Sul Panaro MO

Via G. Verdi, 22

tel. +39 059 936811 • fax +39 059 936804

info@pm-group.eu • www.pm-group.eu

PM is a brand of Manitex International



truck mounted cranes



S STANDARD EQUIPMENT

Slewing by rack & pinion

Fixed stabilizers

Manual proportional valve block

Power link on secondary boom

**Regeneration system
on Extension**

Overload protection

Std manual outriggers

Safety valves

O PTIONAL

Load sensing valve block

**XI stabilizers 5010mm or XXL
5600mm**

Remote control

Tilting stabilizers 45° (manual)

"C" boom version

**Tilting stabilizers 180°
(manual)/ (hydraulic)**

High pressure filter

Winch single /double pulley

Hydraulic lld (no ce)

**Extra functions with hose reels
or racks**


PM tecs lld (no ce)

Led worklamp

Power tronic smart lld (ce)

Stability power system 3-4-5

PM 10021 S C

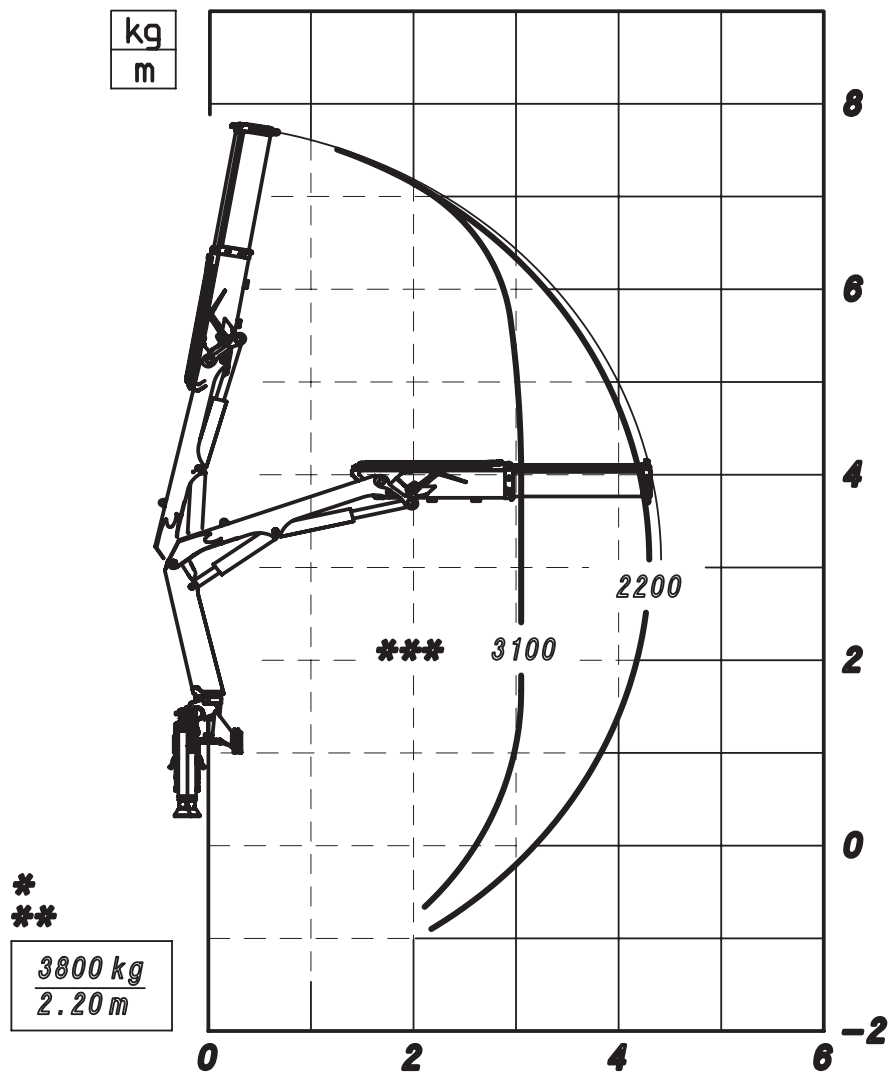

MAXIMUM LIFTING MOMENT

tm 9,5

HYDRAULIC OUTREACH

HORIZONTAL m 4,40

VERTICAL m 7,50

HYDRAULIC SYSTEM

MAX OIL FLOW l/min 40 ÷ 50

MAX PRESSURE Mpa 36,5

OIL TANK CAPACITY l 80

SLEWING SYSTEM

SLEWING ANGLE 400°


SLEWING MOMENT kNm 12

MAX WORKING HEEL % (°) 8,7(5)

STANDARD CRANE WEIGHT

EMPTY OIL TANK kg 1035

PM 10022 S C

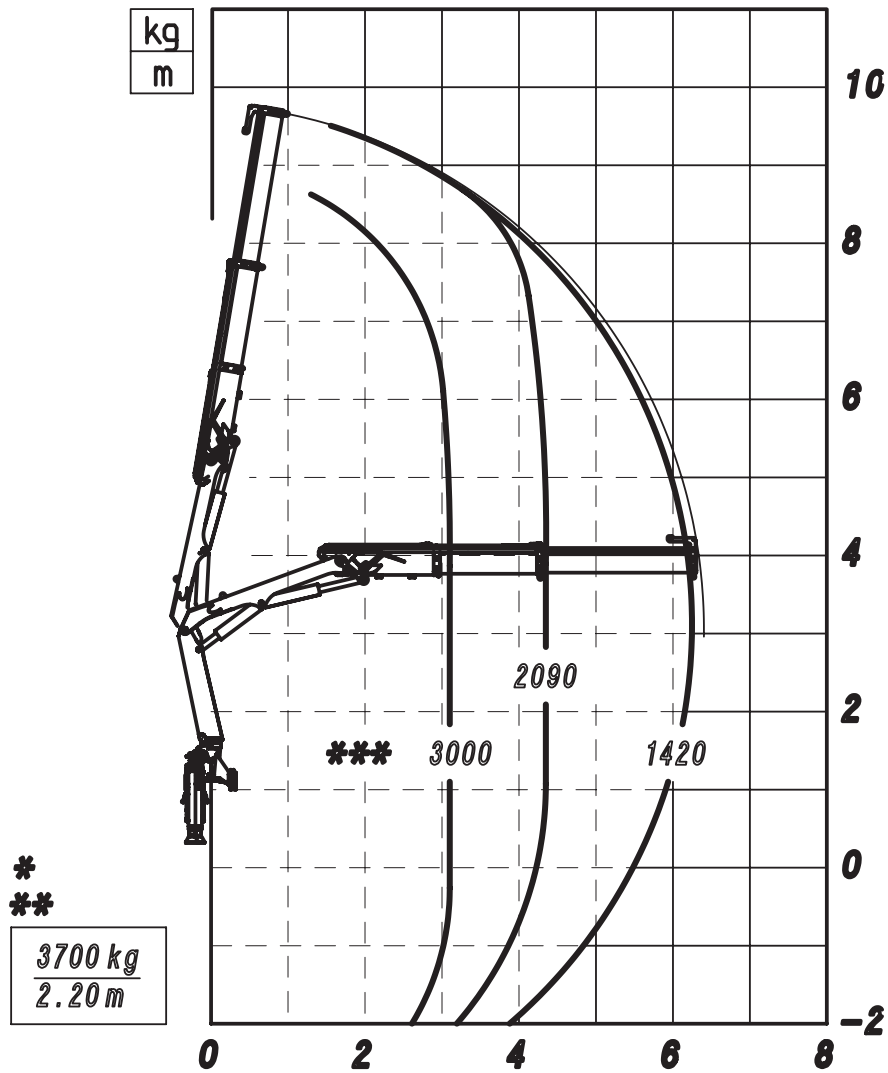

MAXIMUM LIFTING MOMENT

tm 9,3

HYDRAULIC OUTREACH

HORIZONTAL

m 6,40

VERTICAL

m 9,40

HYDRAULIC SYSTEM

MAX OIL FLOW

l/min 40 ÷ 50

MAX PRESSURE

Mpa 36,5

OIL TANK CAPACITY

l 80

SLEWING SYSTEM

SLEWING ANGLE

400°

SLEWING MOMENT

kNm 12

MAX WORKING HEEL


%(°) 8,7(5)

STANDARD CRANE WEIGHT

EMPTY OIL TANK

kg 1155

PM 10023 S C

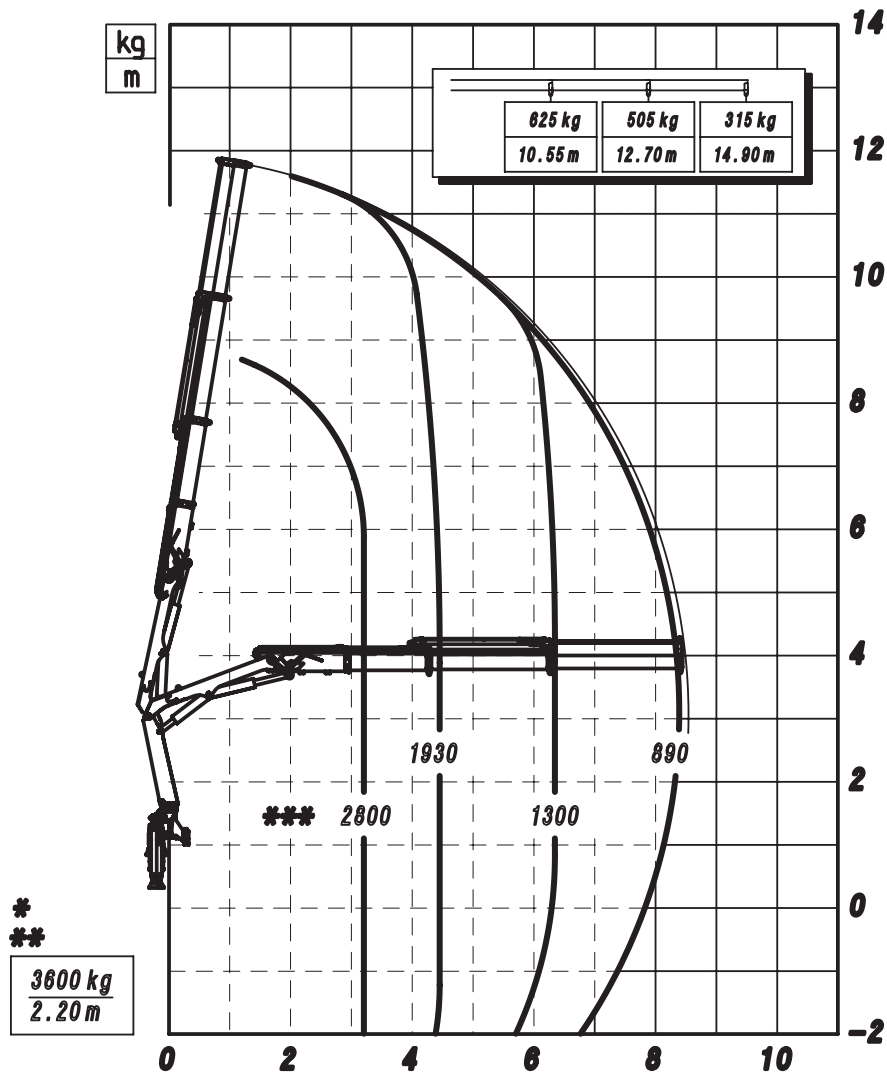

MAXIMUM LIFTING MOMENT

tm 9,0

HYDRAULIC OUTREACH

HORIZONTAL

m 8,50

VERTICAL

m 11,60

HYDRAULIC SYSTEM

MAX OIL FLOW

l/min 40 ÷ 50

MAX PRESSURE

Mpa 36,5

OIL TANK CAPACITY

l 80

SLEWING SYSTEM

SLEWING ANGLE

400°

SLEWING MOMENT

kNm 12

MAX WORKING HEEL


%(°) 8,7(5)

STANDARD CRANE WEIGHT

EMPTY OIL TANK

kg 1265

PM 10024 S C

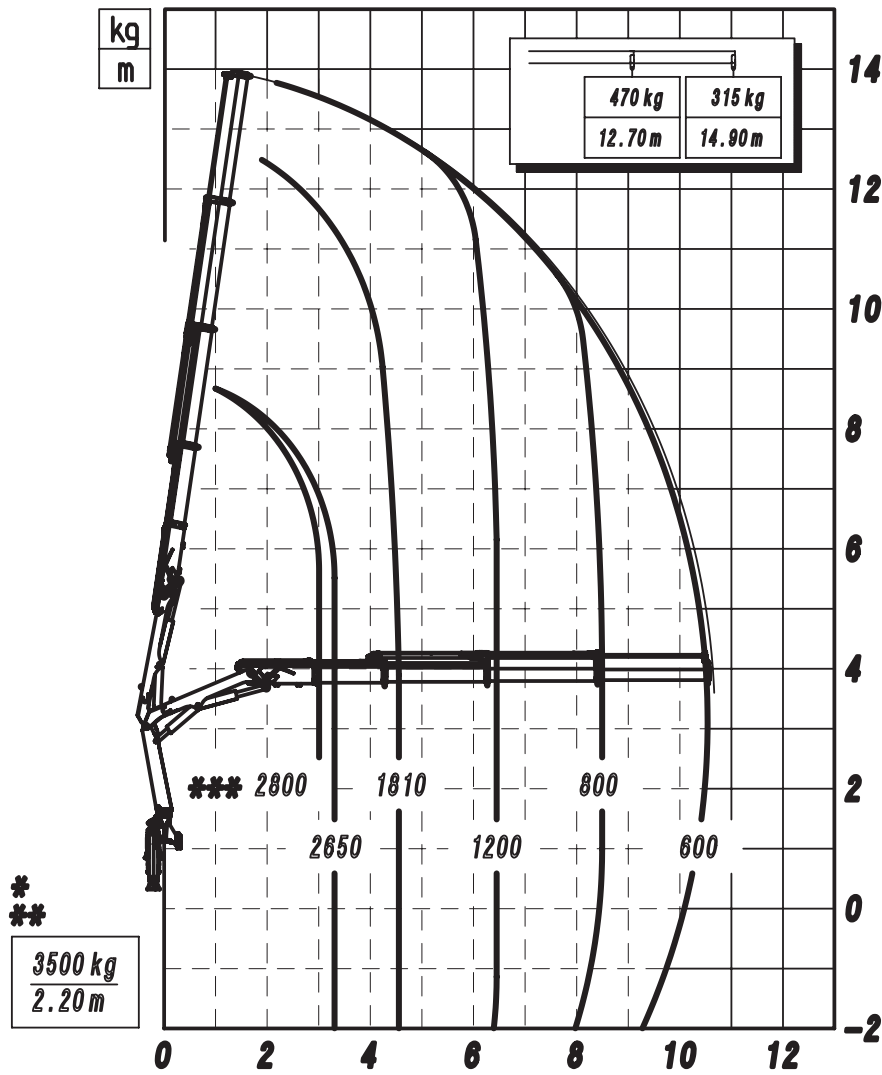

MAXIMUM LIFTING MOMENT

tm 8,7

HYDRAULIC OUTREACH

HORIZONTAL

m 10,65

VERTICAL

m 13,70

HYDRAULIC SYSTEM

MAX OIL FLOW

l/min 40 ÷ 50

MAX PRESSURE

Mpa 36,5

OIL TANK CAPACITY

l 80

SLEWING SYSTEM

SLEWING ANGLE

400°

SLEWING MOMENT

kNm 12

MAX WORKING HEEL


%(°) 8,7(5)

STANDARD CRANE WEIGHT

EMPTY OIL TANK

kg 1365

PM 10025 S C

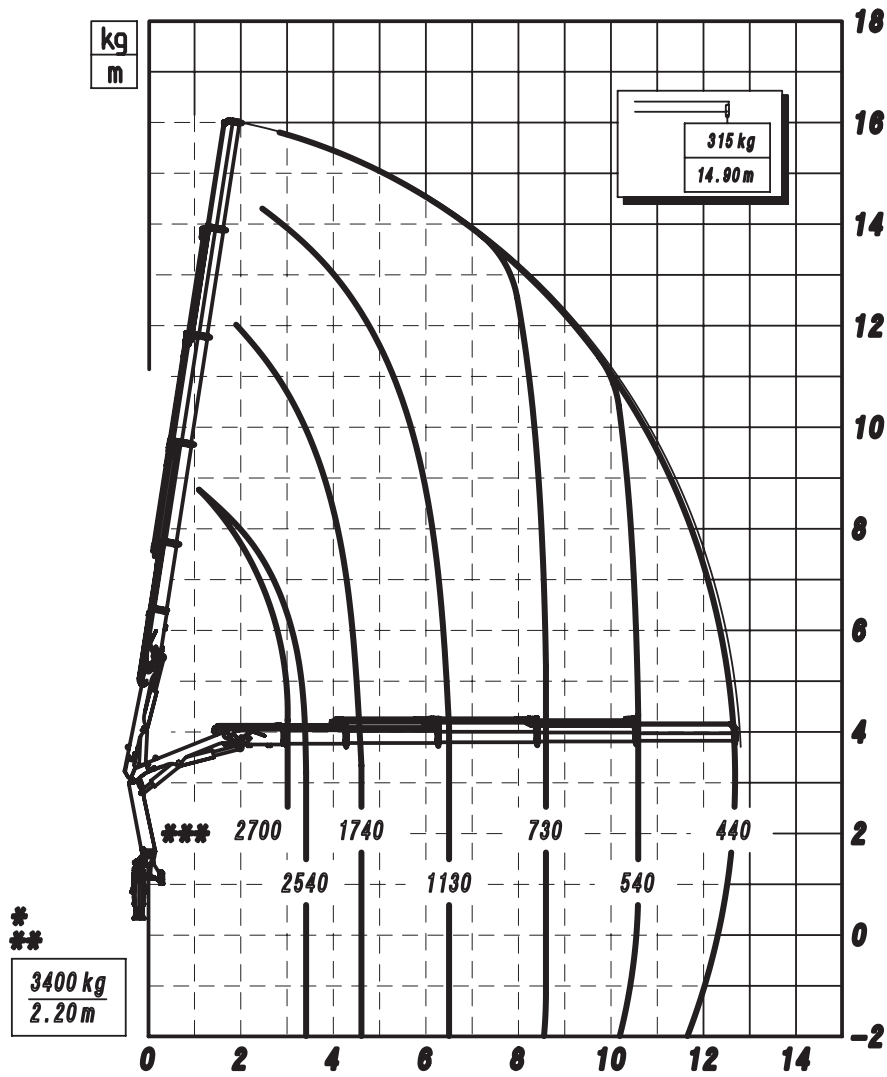

MAXIMUM LIFTING MOMENT

tm 8,6

HYDRAULIC OUTREACH

HORIZONTAL

m 12,80

VERTICAL

m 15,80

HYDRAULIC SYSTEM

MAX OIL FLOW

l/min 40 ÷ 50

MAX PRESSURE

Mpa 36,5

OIL TANK CAPACITY

l 80

SLEWING SYSTEM

SLEWING ANGLE

400°

SLEWING MOMENT

kNm 12

MAX WORKING HEEL



%(°) 8,7(5)

STANDARD CRANE WEIGHT

EMPTY OIL TANK

kg 1445

DIMENSIONS

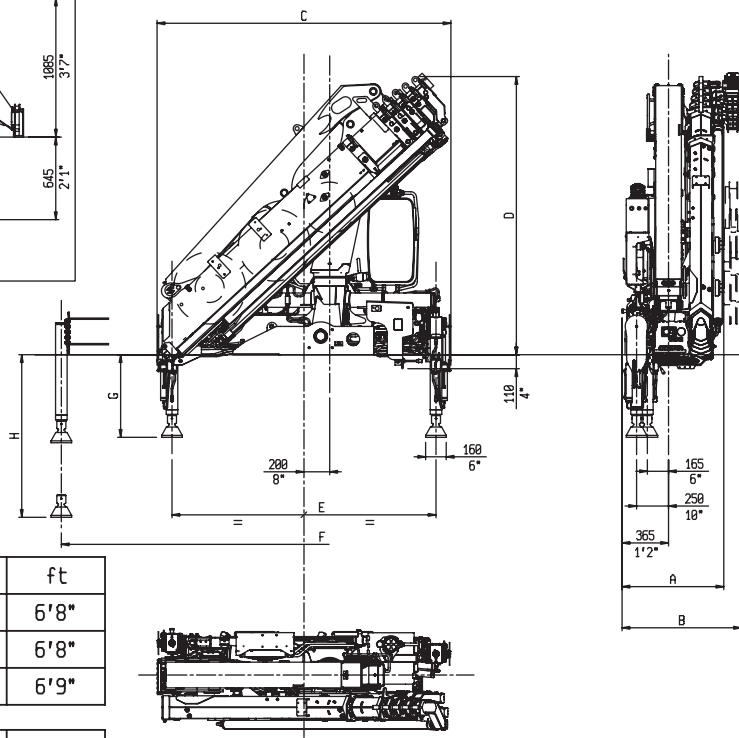

A	10S-11SP		10SC-11SPC	
	mm	ft	mm	ft
Vers.21	730	2'5"	730	2'5"
Vers.22	730	2'5"	730	2'5"
Vers.23	730	2'5"	730	2'5"
Vers.24	780	2'7"	780	2'7"
Vers.25	790	2'7"	790	2'7"

B				
	mm	ft	mm	ft
Vers.21	930	3'1"	---	---
Vers.22	930	3'1"	905	3'
Vers.23	930	3'1"	905	3'
Vers.24	930	3'1"	905	3'
Vers.25	930	3'1"	---	---

C	mm	ft
Fix.	2265	7'5"
Rot.	2290	7'6"

D	mm	ft
Vers.21	2110	6'11"
Vers.22	2110	6'11"
Vers.23	2110	6'11"
Vers.24	2115	6'11"
Vers.25	2170	7'1"
25+	2190	7'2"
24+	2115	6'11"

E	mm	ft
STD	2040	6'8"
XL	2040	6'8"
SXL	2055	6'9"


F	mm	ft
STD	3410	11'2"
XL	5010	16'5"
SXL	5575	18'3"

G	mm	ft
Fix.	645-685	2'1"-2'3"
Rot.	645	2'1"

H	mm	ft
Fix.	1225-1265	4'-4'2"
Rot.	1075	3'6"

WORKING POSITIONS

B	mm	ft
Vers.21	3290	10'10"
Vers.22	3170	10'5"
Vers.23	3060	10'
Vers.24	2950	9'8"
Vers.25	2845	9'4"

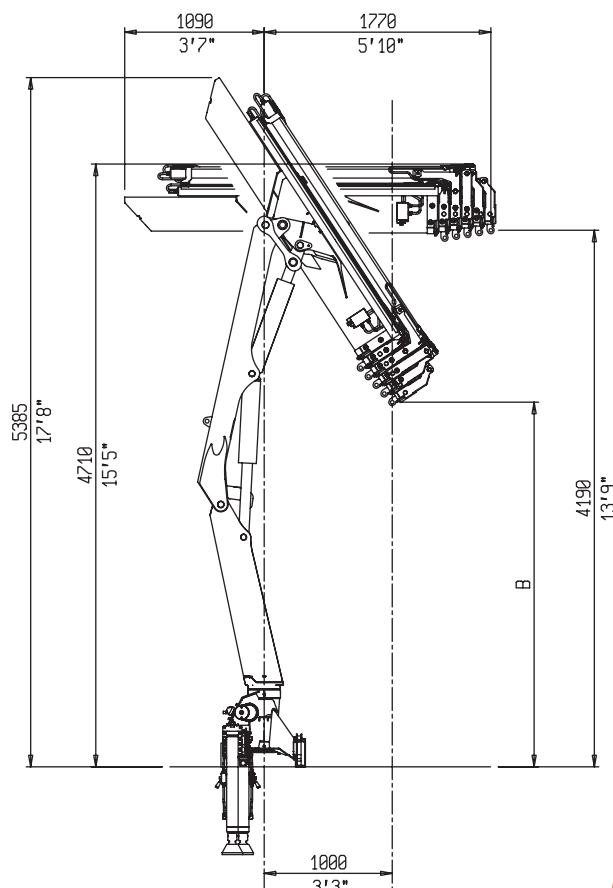

PM Oil&Steel SpA

IT - 41018 S. Cesario Sul Panaro MO

Via G. Verdi, 22

tel. +39 059 936811 • fax +39 059 936804

info@pm-group.eu • www.pm-group.eu

PM is a brand of Manitex International



truck mounted cranes

Technical data, descriptions and illustrations are merely indicative and not binding.
PM Oil&Steel reserve the right to update them without notice.